

Netgear router configuration

SET UP YOUR WI-FI NETWORK & PASSWORD




USE ETHERNET CABLE TO CONNECT TO AND FROM THE LAPTOP - ROUTER



Type in 192.168.1.1 in your web browser
& hit “enter”

Then you should see this page.

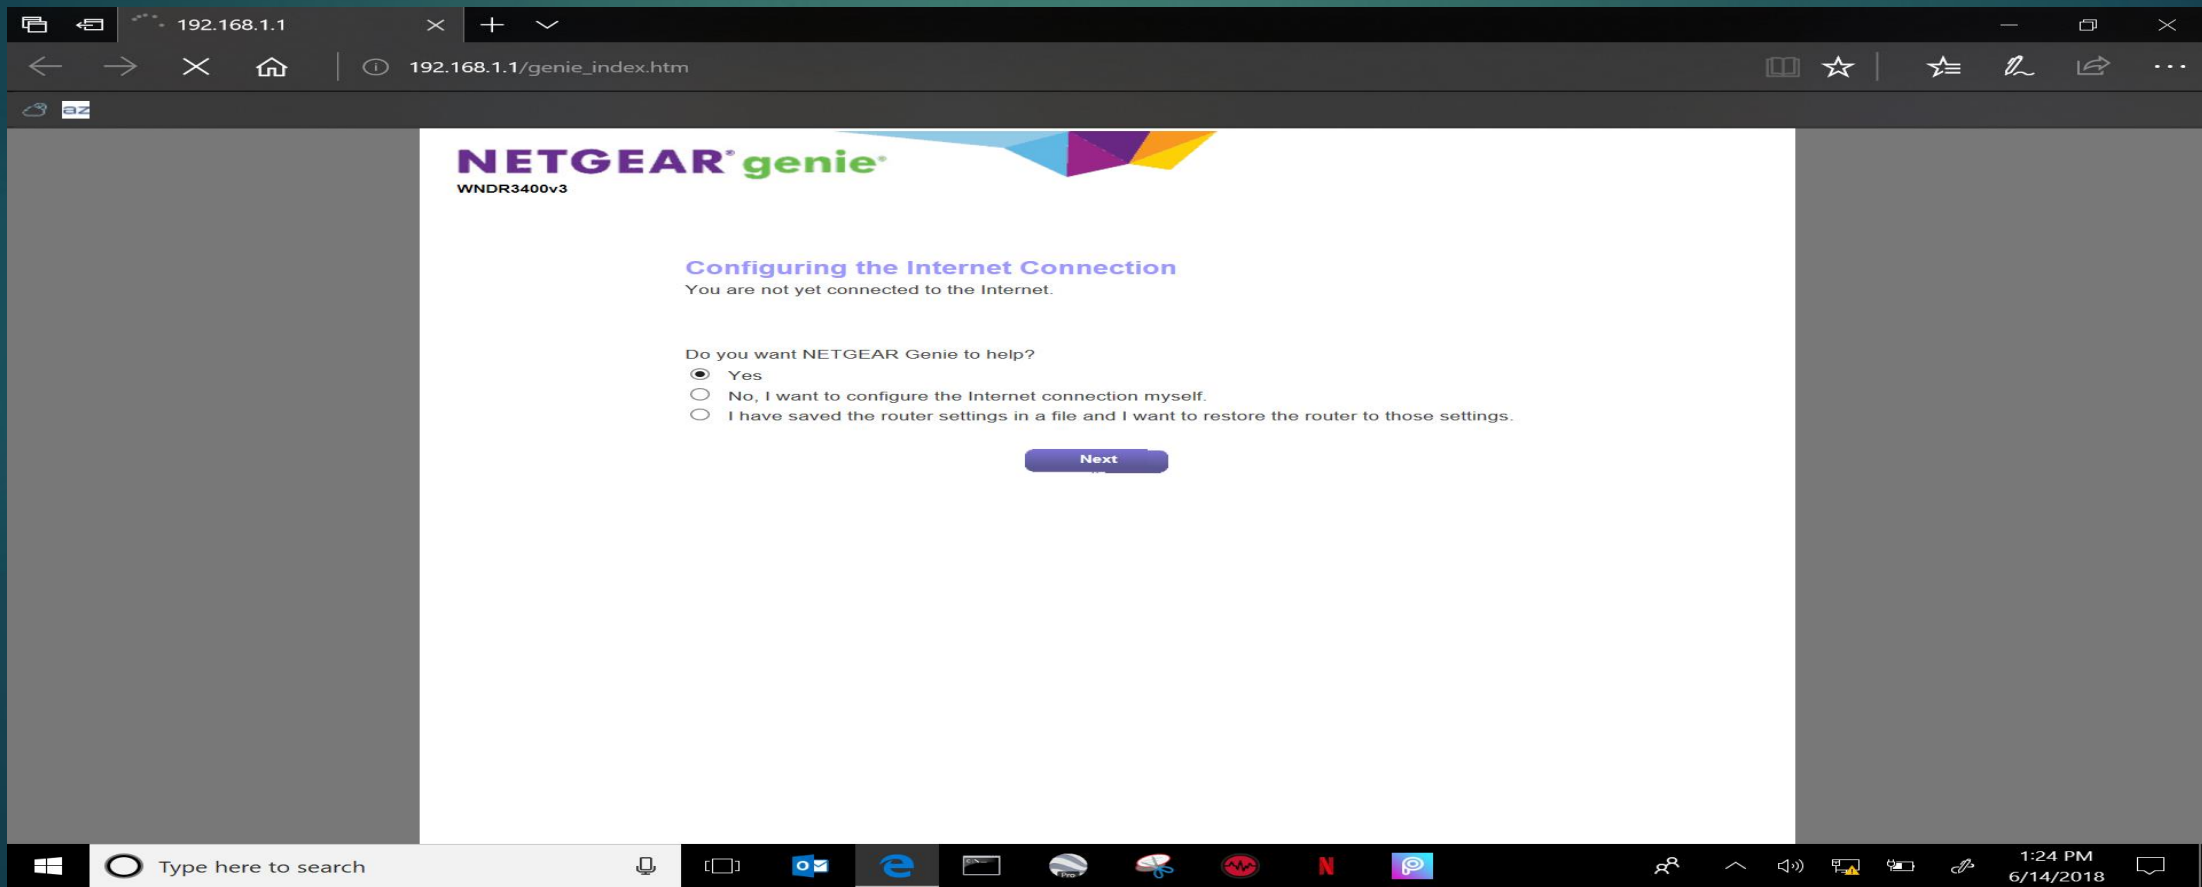

The screenshot shows a web browser window with the address bar displaying "192.168.1.1" and the page title "192.168.1.1/genie_index.htm". The main content area displays the NETGEAR genie logo and the model number "WDR3400v3". Below the logo, the heading "Configuring the Internet Connection" is followed by the message "You are not yet connected to the Internet." A question "Do you want NETGEAR Genie to help?" is presented with three radio button options: "Yes" (selected), "No, I want to configure the Internet connection myself.", and "I have saved the router settings in a file and I want to restore the router to those settings.". A blue "Next" button is centered below the options. The Windows taskbar at the bottom shows the search bar, task view, and various application icons, with the system tray displaying the time "1:24 PM" and date "6/14/2018".

NETGEAR[®] genie[™]
WDR3400v3

Configuring the Internet Connection
You are not yet connected to the Internet.

Do you want NETGEAR Genie to help?

- Yes
- No, I want to configure the Internet connection myself.
- I have saved the router settings in a file and I want to restore the router to those settings.

Next



select No, I want to configure the internet connection myself.
then click “next”

192.168.1.1

192.168.1.1/genie_index.htm

NETGEAR genie
WNR3400v3

Configuring the Internet Connection
You are not yet connected to the Internet.

Do you want NETGEAR Genie to help?

- Yes
- No, I want to configure the Internet connection myself.
- I have saved the router settings in a file and I want to restore the router to those settings.


Next

Type here to search

1:25 PM
6/14/2018



it will ask you for a user name & password

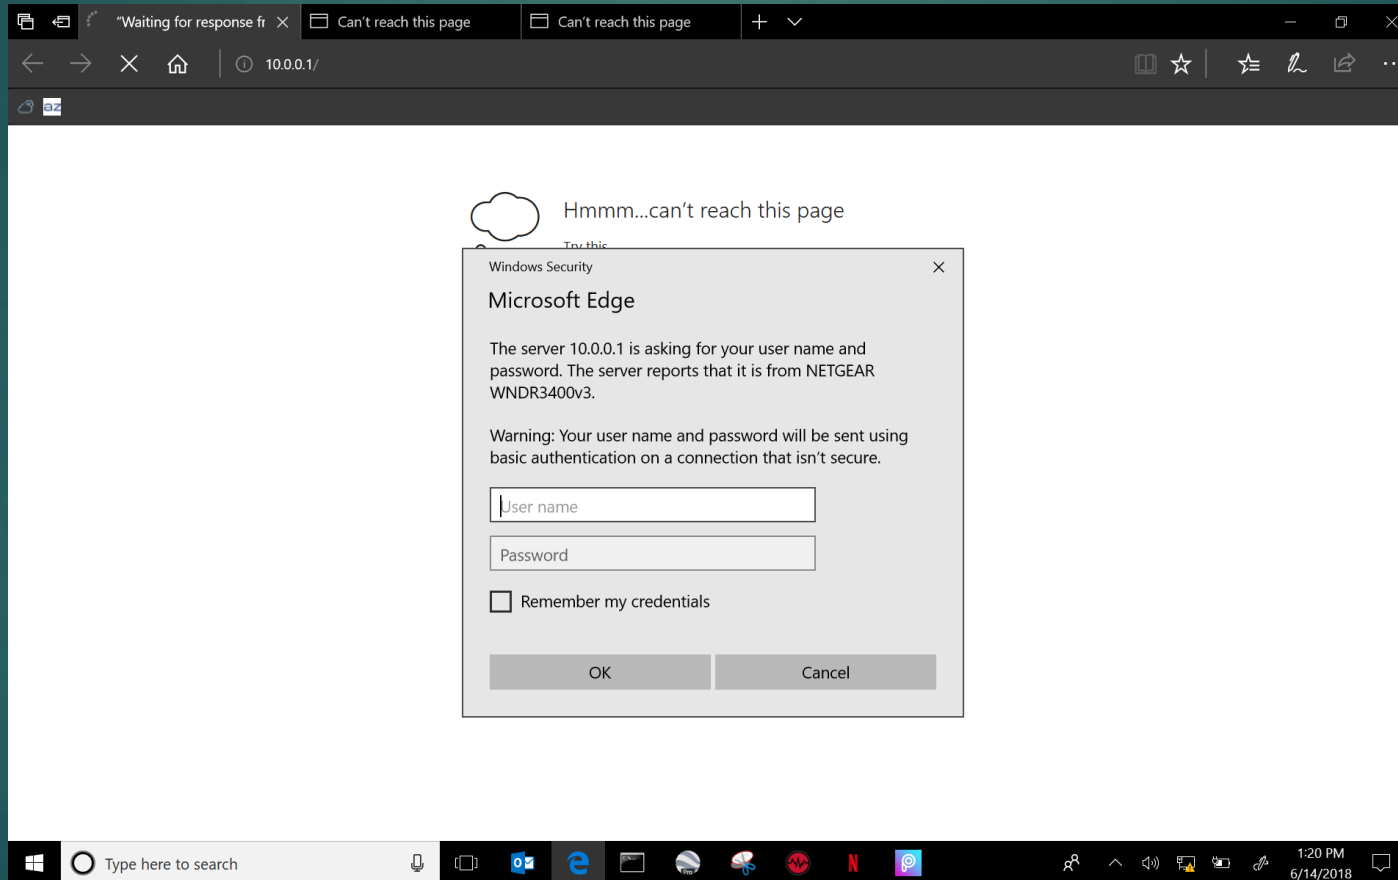

The user name & password is:
ADMIN (ALL LOWER CASE)
PASSWORD (ALL LOWER CASE)

Windows Security

Microsoft Edge

The server 10.0.0.1 is asking for your user name and password. The server reports that it is from NETGEAR WNDR3400v3.

Warning: Your user name and password will be sent using basic authentication on a connection that isn't secure.

admin


••••••••••

Remember my credentials

OK Cancel



Select “remember my credentials” & click “ok”

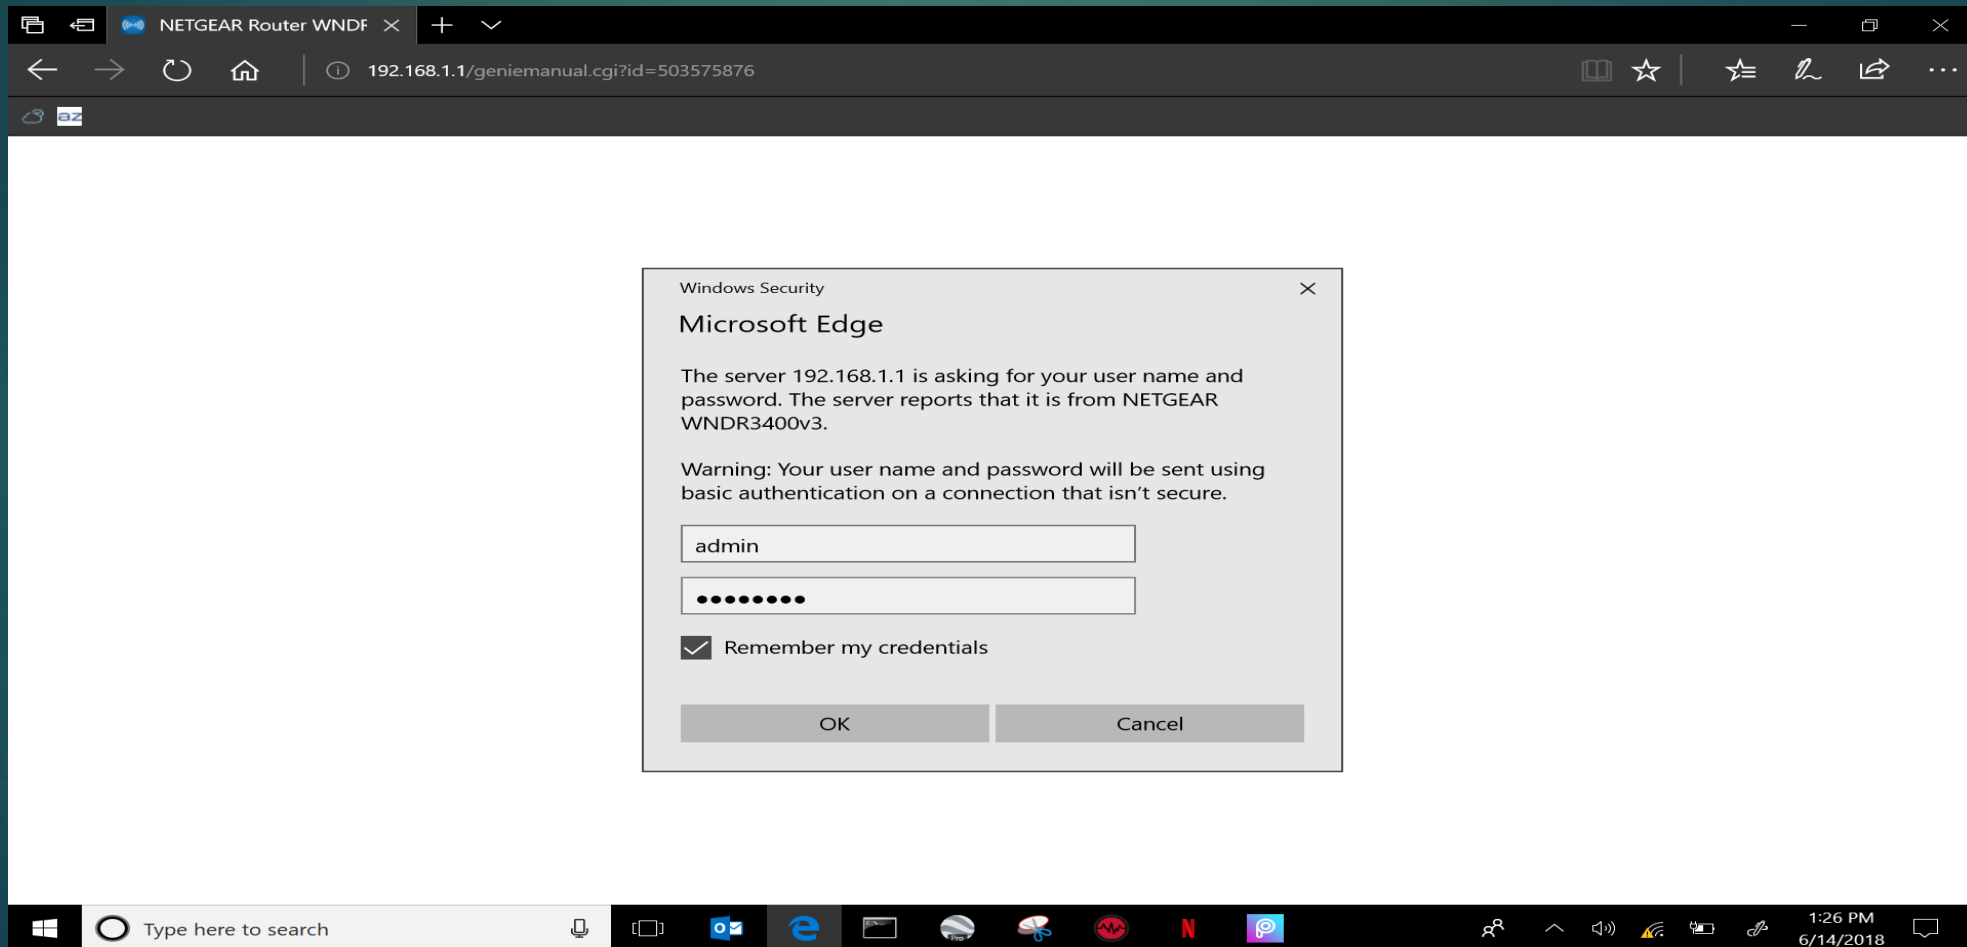

Welcome to your netgear router home page settings. You've logged into your router

The screenshot shows the Netgear Genie web interface for a WNDR3400v3 router. The browser address bar shows the URL 192.168.1.1/start.htm. The interface is divided into a left sidebar with navigation options (Home, Internet, Wireless, Attached Devices, Parental Controls, ReadySHARE, Guest Network) and a main content area. The main area features a grid of six status cards: Internet (Not Connected), Wireless (TGEAR07, Name(SSID): bastelshrub415Key/Passwor), Attached Devices (Number of Devices : 2), Parental Controls (STATUS: NOT ENABLED), ReadySHARE (STATUS: No USB drive), and Guest Network (STATUS: NOT ENABLED). The top right corner includes a Logout button and Firmware Version V1.0.1.8_1.0.56. The bottom of the page has a Help & Support section and a search bar. The Windows taskbar at the bottom shows the time as 1:26 PM on 6/14/2018.



Now, You are on the home tab

The screenshot displays the NETGEAR genie WNDR3400v3 home tab interface. The top navigation bar includes the 'az' logo and the 'NETGEAR genie' branding. Below this, the model number 'WNDR3400v3' is shown. The interface is divided into two main sections: 'BASIC' and 'ADVANCED'. The 'BASIC' section is active and contains a sidebar menu with the following items: Home (selected), Internet, Wireless, Attached Devices, Parental Controls, ReadySHARE, and Guest Network. The main content area features six status cards arranged in a 2x3 grid:

- Internet:** Status is 'Not Connected' (indicated by a red 'x' icon).
- Wireless:** Status is 'NETGEAR07 Name(SSId: pastelshrub415Key/Pass'.
- Attached Devices:** Status is 'Number of Devices : 1'.
- Parental Controls:** Status is 'NOT ENABLED'.
- ReadySHARE:** Status is 'No USB drive'.
- Guest Network:** Status is 'NOT ENABLED'.



Next you will “Click” on the wireless tab on the left side

NETGEAR genie
WNR3400v3

Logout
Firmware Version V1.0.1.8_1.0.56
Auto

BASIC | **ADVANCED**

Home | Internet | **Wireless** | Attached Devices | Parental Controls | ReadySHARE | Guest Network

Wireless Setup

Apply | Cancel

Region Selection
Region: North America

Wireless Network (2.4GHz b/g/n)
 Enable Wireless Isolation
 Enable SSID Broadcast
Name (SSID): NETGEAR07
Channel: Auto
Mode: Up to 145 Mbps

Security Options
 None
 WEP
 WPA-PSK [TKIP]
 WPA2-PSK [AES]
 WPA-PSK [TKIP] + WPA2-PSK [AES]

Passphrase: pastelshrub415 (8-63 characters or 64 hex digits)

Wireless Network (5GHz a/n)
 Enable Wireless Isolation
 Enable SSID Broadcast
Name (SSID): NETGEAR07-5G
Channel: 153
Mode: Up to 300 Mbps

Help Center | Show/Hide Help Center



You can create your “Wi-Fi network name”
(I’ve highlighted the area to enter the network name)

The screenshot displays the Netgear Genie web interface for a WNDR3400v3 router. The interface is divided into two main sections: BASIC and ADVANCED. The ADVANCED section is currently active, showing the Wireless Setup page. The page includes a navigation menu on the left with options like Home, Internet, Wireless, Attached Devices, Parental Controls, ReadySHARE, and Guest Network. The main content area is titled 'Wireless Setup' and contains several configuration options. The 'Region Selection' section shows 'North America' selected. The 'Wireless Network (2.4GHz b/g/n)' section has 'Enable SSID Broadcast' checked, and the 'Name (SSID)' field is highlighted with a red box and contains the text 'NETGEAR07'. The 'Channel' is set to 'Auto' and the 'Mode' is 'Up to 145 Mbps'. The 'Security Options' section has 'WPA2-PSK [AES]' selected. The 'Passphrase' field contains 'pastelshrub415'. The 'Wireless Network (5GHz a/n)' section has 'Enable SSID Broadcast' checked, and the 'Name (SSID)' field contains 'NETGEAR07-5G', the 'Channel' is '153', and the 'Mode' is 'Up to 300 Mbps'. The interface also includes a 'Help Center' link and a search bar at the bottom.



Edit your Wi-Fi how you want I put “customer’s Wi-Fi” for an example

The screenshot displays the Netgear Genie web interface for a WDR3400v3 router. The browser address bar shows the URL 192.168.1.1/start.htm. The interface is divided into a left sidebar with navigation options (Home, Internet, Wireless, Attached Devices, Parental Controls, ReadySHARE, Guest Network) and a main content area titled 'Wireless Setup'. The 'Wireless Setup' page includes a 'Region Selection' dropdown set to 'North America', 'Apply' and 'Cancel' buttons, and two wireless network configuration sections. The 'Wireless Network (2.4GHz b/g/n)' section has 'Enable SSID Broadcast' checked, 'Name (SSID)' set to 'Customer's Wifi', 'Channel' set to 'Auto', and 'Mode' set to 'Up to 145 Mbps'. The 'Security Options' section has 'WPA2-PSK [AES]' selected, and the 'Passphrase' field contains 'pastelshrub415'. The 'Wireless Network (5GHz a/n)' section has 'Enable SSID Broadcast' checked, 'Name (SSID)' set to 'NETGEAR07-5G', 'Channel' set to '153', and 'Mode' set to 'Up to 300 Mbps'. The bottom of the page features a 'Help & Support' section with a search bar and a Windows taskbar at the very bottom showing the time as 1:29 PM on 6/14/2018.



select a new passphrase for your Wi-Fi,
for example I used “password to Wi-Fi”
once you are done click “apply”

The screenshot shows the Netgear Genie web interface for a WDR3400v3 router. The browser address bar shows the URL 192.168.1.1/start.htm. The page has a sidebar with navigation options: Home, Internet, Wireless (selected), Attached Devices, Parental Controls, ReadySHARE, and Guest Network. The main content area is titled "Wireless Setup" and contains the following sections:

- Region Selection:** Region: North America (dropdown)
- Wireless Network (2.4GHz b/g/n):**
 - Enable Wireless Isolation
 - Enable SSID Broadcast
 - Name (SSID): Customer's Wifi
 - Channel: Auto (dropdown)
 - Mode: Up to 145 Mbps (dropdown)
- Security Options:**
 - None
 - WEP
 - WPA-PSK [TKIP]
 - WPA2-PSK [AES]
 - WPA-PSK [TKIP] + WPA2-PSK [AES]
- Passphrase: PASSWORD TO WIFI (8-63 characters or 64 hex digits)
- Wireless Network (5GHz a/n):**
 - Enable Wireless Isolation
 - Enable SSID Broadcast
 - Name (SSID): NETGEAR07-5G
 - Channel: 153 (dropdown)
 - Mode: Up to 300 Mbps (dropdown)

At the top of the main content area, there are "Apply" and "Cancel" buttons. The bottom of the page features a "Help & Support" section with a search bar and a "GO" button. The Windows taskbar at the bottom shows the search bar, system tray, and the date/time 1:29 PM 6/14/2018.



Once applied, let it update.

The screenshot displays the Netgear Genie web interface for a WNR3400v3 router. The interface is divided into two main sections: 'BASIC' and 'ADVANCED'. The 'BASIC' section is currently selected, and the 'Wireless' menu item is highlighted. The 'Updating Settings' page is shown with a progress bar indicating the update status. The firmware version is V1.0.1.8_1.0.56, and the update mode is set to 'Auto'. The interface also includes a 'Logout' button and a 'SEARCH HELP' section at the bottom.

NETGEAR genie
WNR3400v3

Logout
Firmware Version V1.0.1.8_1.0.56
Auto

BASIC | **ADVANCED**

Home
Internet
Wireless
Attached Devices
Parental Controls
ReadySHARE
Guest Network

Updating Settings

Help & Support | Documentation | Online Support | Router FAQ | SEARCH HELP | Enter Search Item | GO

Type here to search | 3:14 PM 6/14/2018

Once it updates, exit the web page.

NETGEAR genie®
WDR3400v3

Logout
Firmware Version V1.0.18_1.0.56
Auto

BASIC | **ADVANCED**

Home | Internet | **Wireless** | Attached Devices | Parental Controls | ReadySHARE | Guest Network

Wireless Setup

Apply | Cancel

Mode: Up to 145 Mbps

Security Options

- None
- WEP
- WPA-PSK [TKIP]
- WPA2-PSK [AES]
- WPA-PSK [TKIP] + WPA2-PSK [AES]

Passphrase: passphrase to wifi (8-63 characters or 64 hex digits)

Wireless Network (5GHz a/n)

- Enable Wireless Isolation
- Enable SSID Broadcast

Name (SSID): NETGEAR07-5G

Channel: 153

Mode: Up to 300 Mbps

Security Options

- None
- WEP
- WPA-PSK [TKIP]
- WPA2-PSK [AES]
- WPA-PSK [TKIP] + WPA2-PSK [AES]

Passphrase: pastelshrub415 (8-63 characters or 64 hex digits)

Help Center | Show/Hide Help Center

Help & Support | Documentation | Online Support | Router FAQ | SEARCH HELP | Enter Search Item | GO

Type here to search | 3:14 PM 6/14/2018

Now you can scan & search for your personalized Wi-Fi network name.

